




TIKEN BEARINGS CO.,LTD.

NTN 6204llu Bearing

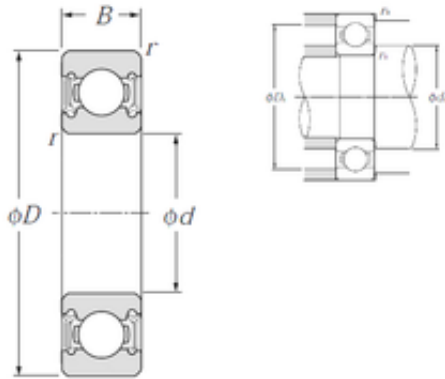

Bearing No. 6204llu

6204llu Bearing 2D drawings and 3D CAD models

Size	20x47x14 mm
Bore Diameter	20 mm
Outer Diameter	47 mm
Width	14 mm
d	20 mm
D	47 mm
B	14 mm
C	14 mm
r min.	1 mm
da min.	25 mm
da max	28 mm
Da max.	42 mm
ra max.	1 mm
Weight	0,106 Kg
Basic dynamic load rating (C)	12,8 kN
Basic static load rating (C0)	6,65 kN
Reference speed	10 000 r/min
Category	Single Row Ball Bearings
Inventory	13.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.103
EAN	4547359004540
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1 ISO P0



TIKEN BEARINGS CO.,LTD.

Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	20MM Bore; 47MM Outside Diameter; 14MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Other Features	Deep Groove Double Lip Friction Nitrile Rubber Seal -20 To 120 Deg C
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6204LLU
Weight / LBS	0.227
Bore	0.787 Inch 20 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	1.85 Inch 47 Millimeter
Outer Race Width	0.551 Inch 14 Millimeter
bore diameter:	20 mm
precision rating:	ISO Class 0



TIKEN BEARINGS CO.,LTD.

outside diameter:	47 mm
finish/coating:	Uncoated
overall width:	14 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Sealed
inner ring width:	14 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	14 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	10000 rpm
internal clearance:	CN
fillet radius:	1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	18000 RPM
dynamic load capacity:	12800 N
series:	62
static load capacity:	6650 N
manufacturer product page:	Click here